


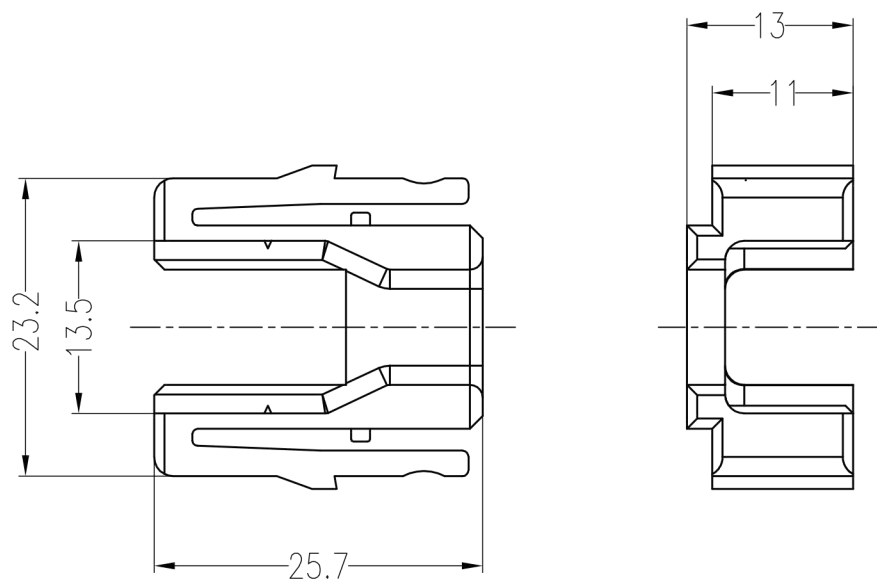

技术参数:


插芯:


- 插针数: 8
- 额定电流: 1A
- 额定电压: 50V
- 额定脉冲电压: 0.8kV
- 污染等级: 3
- 依据UL的额定电压: <30V
- 传输特性: 超6类可达500MHz
依据 ISO/IEC 24 702;
ISO/IEC 11 801
- 传输速度: 10/100/1000Mbit/10Gbit/s
- 绝缘阻抗: $>10^{10}\Omega$
- 材料: 聚碳酸酯
- 颜色: RAL 7032 (浅灰色)
- 温度范围: $-40^{\circ}\text{C} - +85^{\circ}\text{C}$
- 依据UL 94的阻燃等级: V0
- 可插拔次数: >500

Technical specification:

Inserts:

- No. of contact: 8
- Rated current: 1A
- Rated voltage: 50V
- Rated impulse voltage: 0.8kV
- Pollution degree: 3
- Rated voltage acc.to UL: <30V
- Transmission features: category 6/Class E
up to 500 MHz; acc.
to ISO/IEC 24 702;
ISO/IEC 11 801
- Transmission rate: 10/100/1000Mbit/10Gbit/s
- Insulation resistance: $\geq 10^{10}\Omega$
- Material: polycarbonate
- Colour: RAL 7032(light grey)
- Temperature range: $-40^{\circ}\text{C} - +85^{\circ}\text{C}$
- Flammability acc.to UL 94: V0
- Mating cycles: ≥ 500

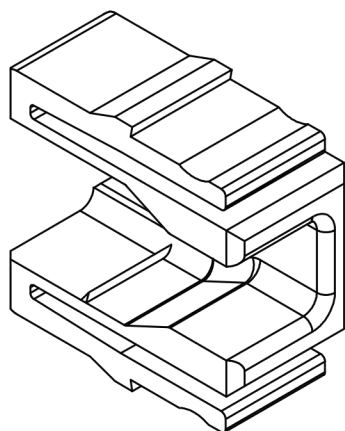

 			订货号 Order No.
版本 REV	重量 weight	比例 Scale	产品代号 Part Code
V1.0		1:1	SO-HM-RJ45-APT
 浙江思美克电气科技有限公司 ZHEJIANG SMICO ELECTRICAL TECHNOLOGY CO.,LTD			